




AL.1.31/.. ÜG

- replaceable flexible insert
- hygienic, smooth insert
- Non-PVC
- projecting flexible insert
- stable aluminium joists

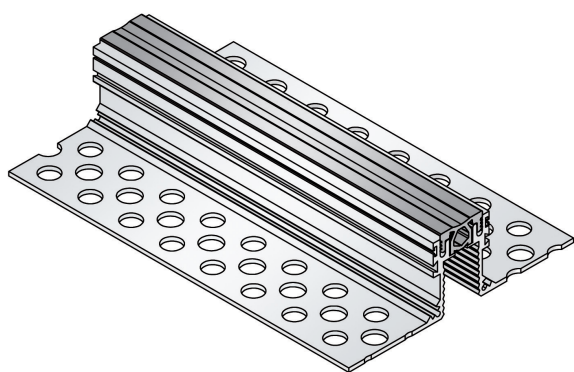

FEATURES

expansion insert can be replaced anytime, abrasion, weather and temperature resistant (-40°C bis +120°C), punched bearing legs guarantee best connection to the subgrade/covering., the profile is fitted as part of floor-laying work with a surface-flush insert and can therefore be used as a strip edge., as the floor is being laid, the existing insert is replaced by a projecting insert provided separately on rolls.

APPLICATIONS

residential, office and administration buildings, hospitals and clean rooms

MATERIAL

aluminium, synthetic rubber flexible insert (EPDM)

COVERING TYPES

screed with upper layer from linoleum, rubber or carpet

FORMED PARTS

corner piece, T piece, cross piece, transition floor to wall

NOTES

Projection flexible insert: 3 mm


Technical data

Movement horizontal:	6 mm (±3 mm)
Movement vertical:	6 mm (±3 mm)
Visible width:	31 mm
Maximal joint width:	30 mm
Load rating:	wheel load 700 kg up to Ø 150 mm, B = 100 mm
Supply length:	3 mtr
Color of flexible insert:	grey

Designs

Article No.	Profile height (h)	Recess(WxD)
AL.1.31/23 ÜG	23 mm	200 x 30 mm
AL.1.31/36 ÜG	36 mm	200 x 43 mm
AL.1.31/53 ÜG	53 mm	200 x 60 mm
AL.1.31/66 ÜG	66 mm	200 x 73 mm
AL.1.31/86 ÜG	86 mm	200 x 93 mm
AL.1.31/106 ÜG	106 mm	200 x 113 mm
AL.1.31/126 ÜG	126 mm	200 x 133 mm

Special heights on request.

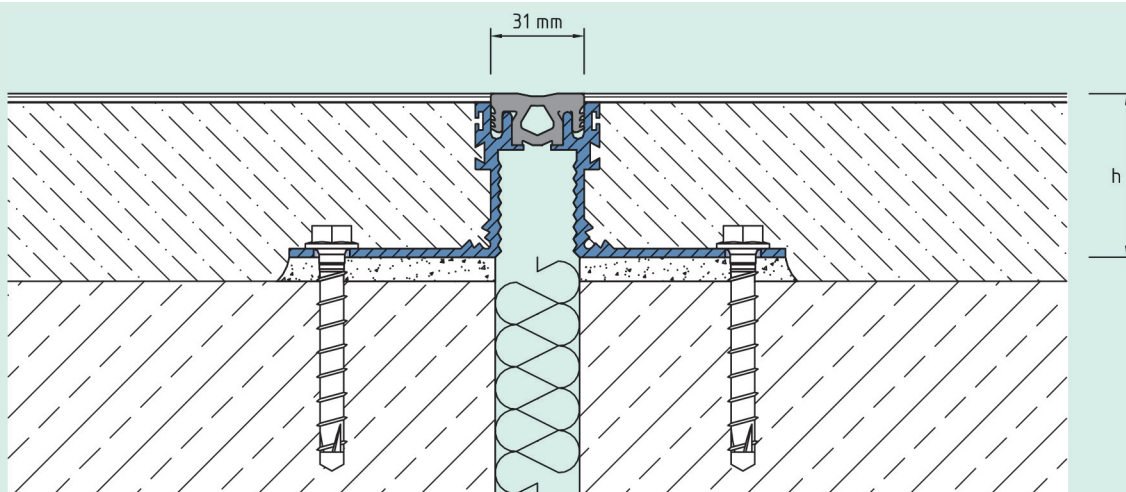

AL.1.31

Subject to technical change without notice.