



KDF..

- cable fairlead
- with loose/fixed flange
- non-insulated superstructure

APPLICATIONS

outdoor, multi-storey and underground park decks, all industrial applications, shopping centres, railway stations, airports, exhibition halls

MATERIAL

hot-dip galvanised steel, high-grade steel V4A (on request)

COVERING TYPES


asphalt, concrete, screed

NOTES

Threaded bolt M12x35 mm

- KDF/34 mit Pipe Ø 33,7 mm

- KDF/48 mit Pipe Ø 48,3 mm

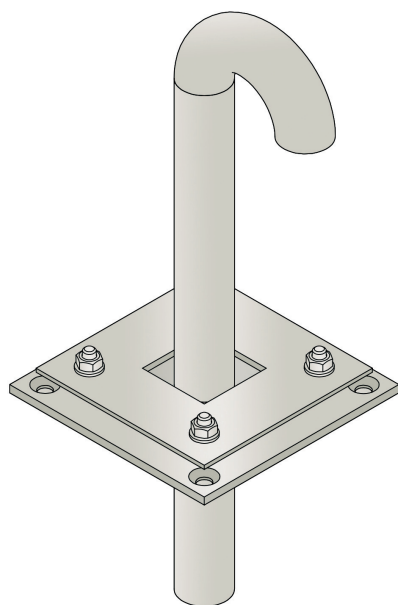

Technical data

Material thickness fixed flange: 8 mm

Material thickness loose flange: 6 mm

Designs

Article No.


KDF34

KDF48

Height (h)

400 mm

400 mm

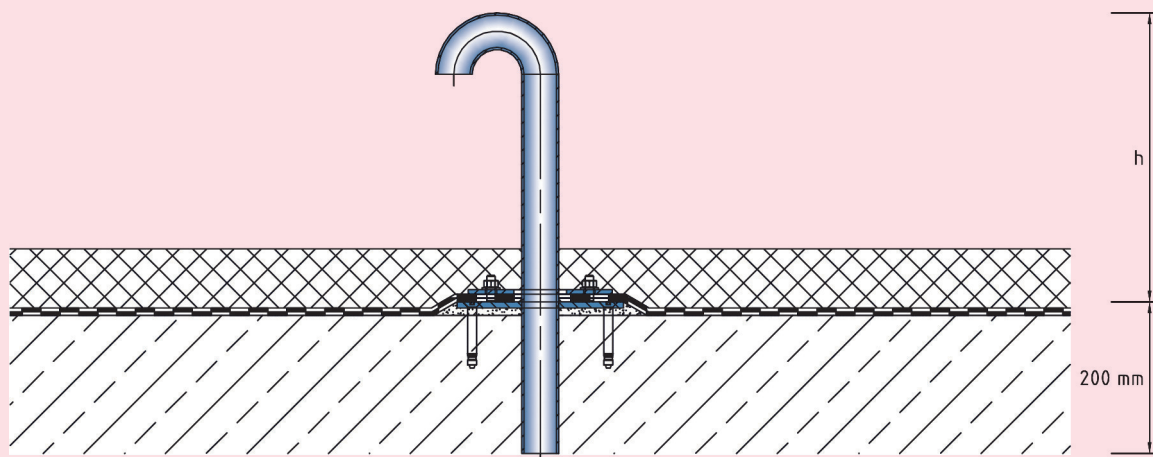

Subject to technical change without notice.