




VA.1.90/..

- replaceable flexible insert
- Non-PVC
- stable aluminium joists
- high-grade steel profile edge

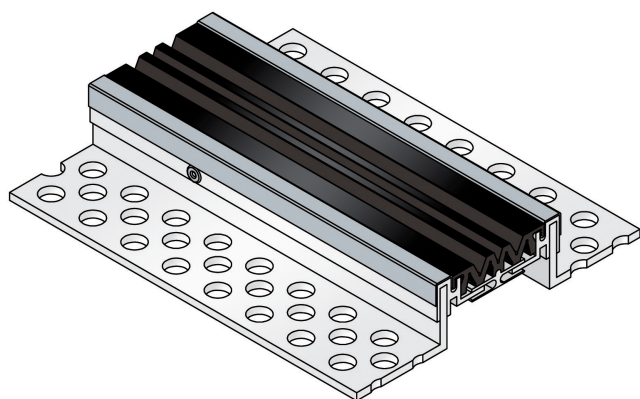

FEATURES

expansion insert can be replaced anytime, abrasion, weather and temperature resistant (-40°C bis +120°C), punched bearing legs guarantee best connection to the subgrade/covering.

APPLICATIONS

residential, office and administration buildings

MATERIAL

aluminium joists with edge profile in high-grade steel, synthetic rubber flexible insert (EPDM)

COVERING TYPES

screed, natural and stone slabs

FORMED PARTS

corner piece, T piece, cross piece

NOTES


In case of mastic asphalt, please request a technical consultation.

Technical data

Movement horizontal:	26 mm (± 13 mm)
Movement vertical:	16 mm (± 8 mm)
Visible width:	90 mm
Maximal joint width:	65 mm
Load rating:	wheel load 700 kg up to \varnothing 150 mm, B = 100 mm
Supply length:	3 mtr
Color of flexible insert:	black or grey

Designs

Article No.	Profile height (h)	Recess (WxD)
VA.1.90/34	34 mm	260 x 44 mm
VA.1.90/44	44 mm	260 x 54 mm
VA.1.90/64	64 mm	260 x 74 mm
VA.1.90/84	84 mm	260 x 94 mm
VA.1.90/104	104 mm	260 x 114 mm
Special heights on request.		

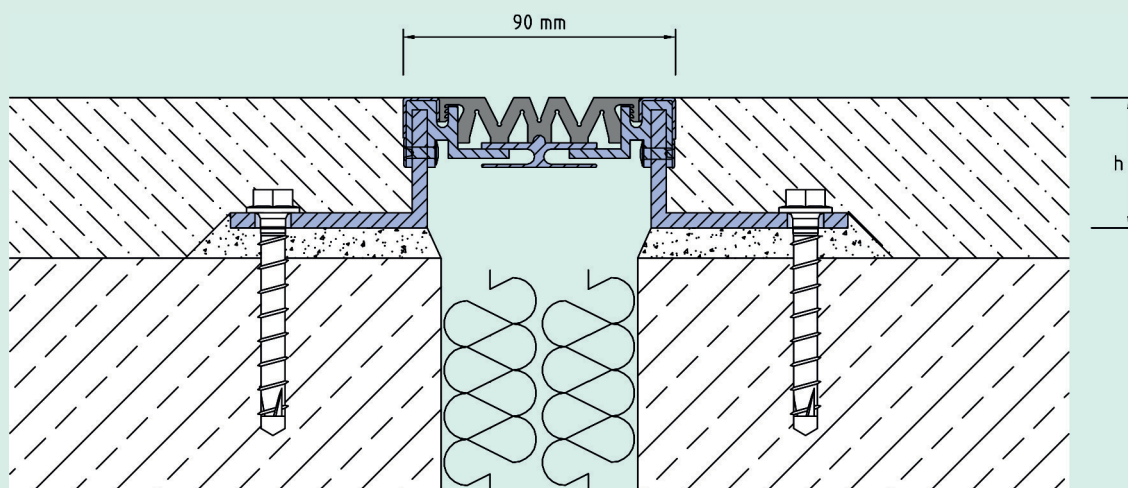

VA.1.90

Subject to technical change without notice.