




## VA.7.165/0

- for heavy loads
- installation in site-mixed concrete
- vibration-free trafficability
- visible surface in high-grade steel

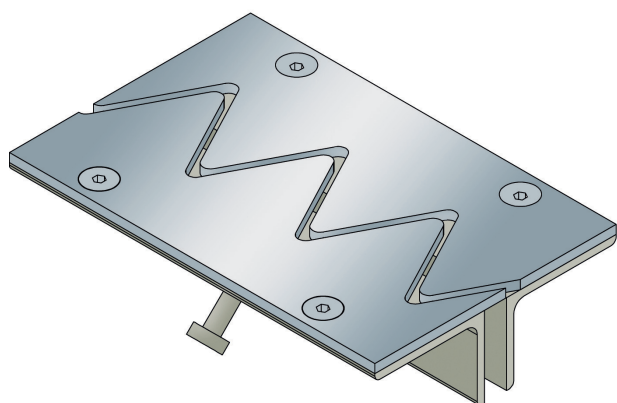

### FEATURES

resistant to heavy loads, trafficable by fork-lift trucks

### APPLICATIONS

all industrial applications, areas with use of driverless vehicular systems, shopping centres, railway stations, airports, exhibition halls

### MATERIAL

hot-dip galvanised steel substructure and high-grade steel V2A surface

### COVERING TYPES

concrete, industrial covering

### TRAFFICABILITY

industrial trucks (lifting trucks, fork-lifts etc.), passenger car, trucks

### FORMED PARTS


corner piece, T piece, cross piece

### Technical data

Movement horizontal:	25 mm (-10/+15 mm)
Visible width:	165 mm
Maximal joint width:	20 mm
Load rating:	wheel load 5000 kg up to Ø 150 mm, B = 100 mm
Load rating trucks:	600 kN (DIN 1072)
Load rating forklifts:	150 kN (DIN 1055-3)
Supply length:	3 mtr

### Designs

Article No.	Profile height (h)
VA.7.165/0	56 mm

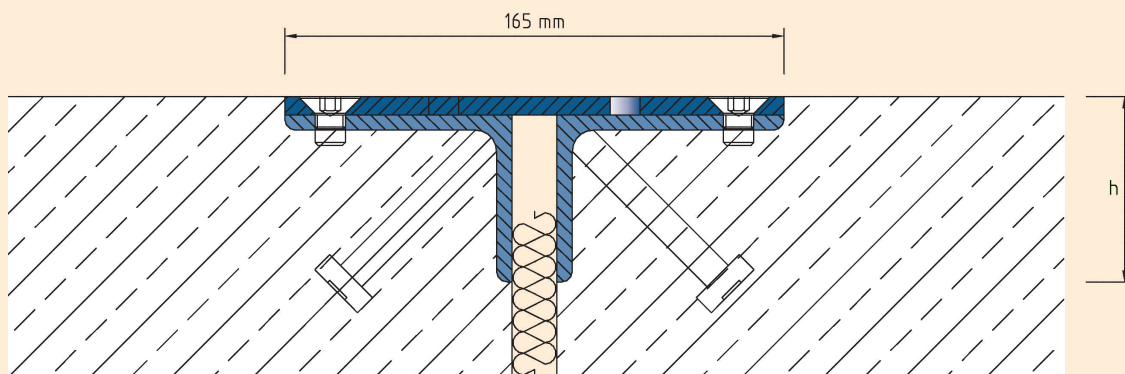

VA.7.165

Subject to technical change without notice.