




ALK.4.120/..

- low profile height
- with coating-flange

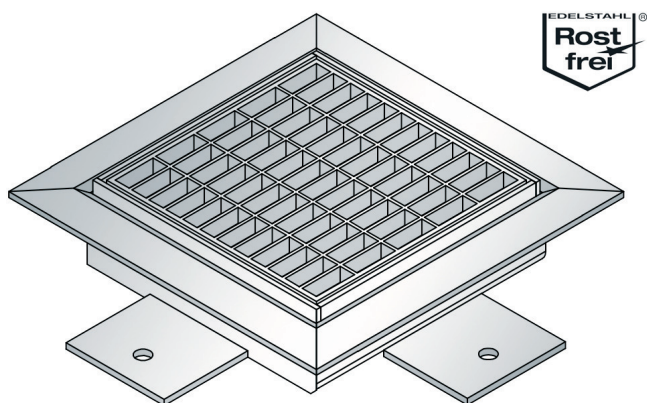

FEATURES

permanently tight, corrosion-resistant, high flexibility (variable heights and widths), mesh size of the steel grating in 30X10 mm or 30x30 mm possible, grate adjustment inclusive, drain pipe DN70, length 200 mm

APPLICATIONS

outdoor, multi-storey and underground park decks, all industrial applications, shopping centres, railway stations, airports, exhibition halls

MATERIAL

high-grade steel V4A (on request)

COVERING TYPES

coating, screed, industrial covering

TRAFFICABILITY

passenger car

NOTES

For stainless steel gutters, the general cleaning and care instructions must be observed (see also www.buprofile.de - Download section).

Our engineers and technicians can be of assistance during installation on request.

Technical data

Material/sheet thickness: 3 mm
Steel grating width: 120 mm

Designs

Article No.

ALK.4.120/50

ALK.4.120/60

Special heights on request.



Channel height (h) Recess(WxD)

50 mm

300 x 60 mm

60 mm

300 x 70 mm

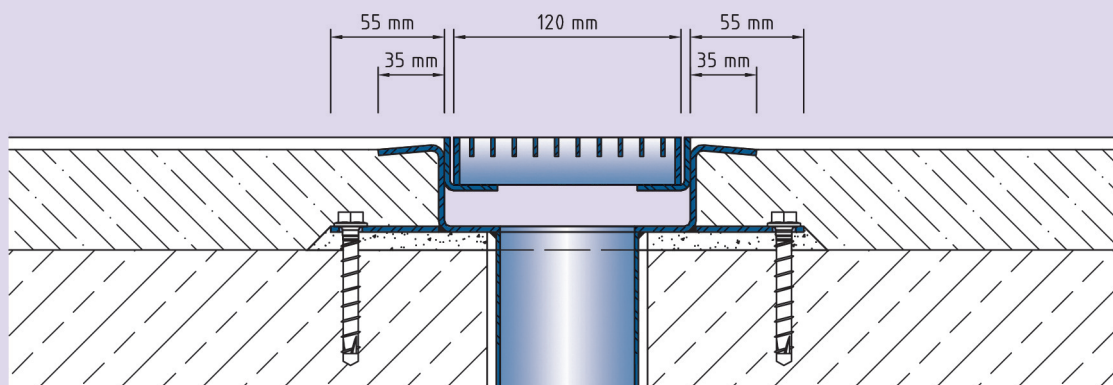

ALK.4.120

Subject to technical change without notice.