



ALK.4.120/..

- low installation height
- with coating-flange

FEATURES

permanently tight, corrosion-resistant, high flexibility (variable heights and widths), mesh size grating in 30x10 mm (30x30 mm on request), grid lock inclusive, drain pipe DN70, length 200 mm

APPLICATIONS

parking decks, parking garages, underground garages, all industrial applications, shopping centres, railway stations, airports, exhibition halls

MATERIAL

stainless steel V2A (V4A on request)

COVERING TYPES

coating, screed, industrial coverings


TRAFFICABILITY

passenger cars

NOTES

For stainless steel, the general cleaning and care instructions must be observed (see also download area).

Installation by our own fitters recommended.

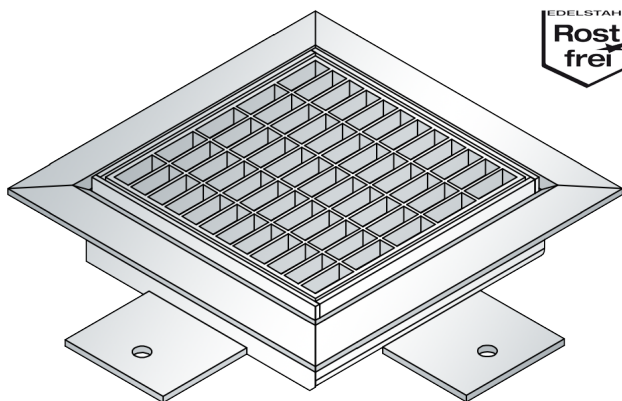


TECHNICAL DATA

Material/sheet thickness: 3 mm
Steel grating width: 120 mm

DESIGNS

ARTICLE NO.	CHANNEL HEIGHT (h)	RECESS (BxT)
ALK.4.120/50	50 mm	300 x 60 mm
ALK.4.120/60	60 mm	300 x 70 mm

Special heights on request.

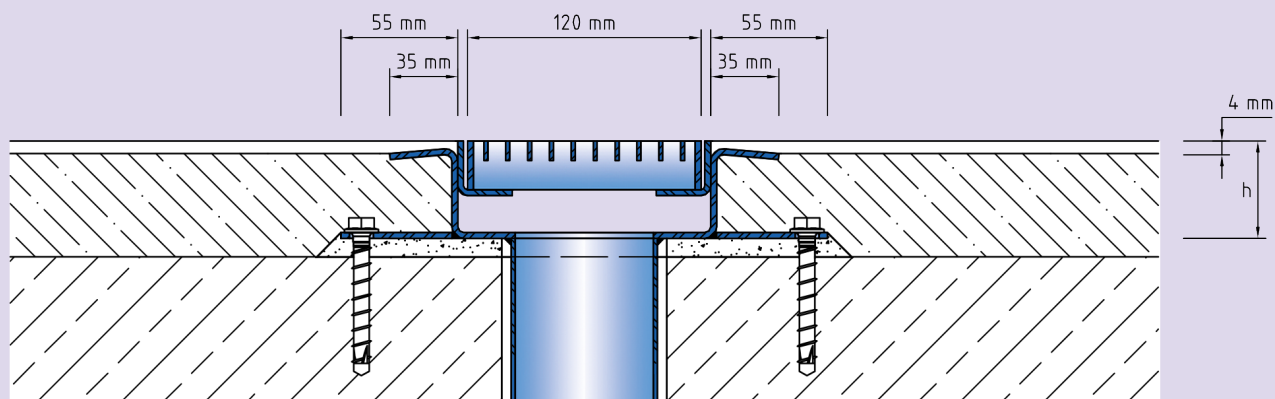

ALK.4.120

Subject to technical change without notice.