




ALR.8.200/..

- high load-bearing capacity
- with coating-flange

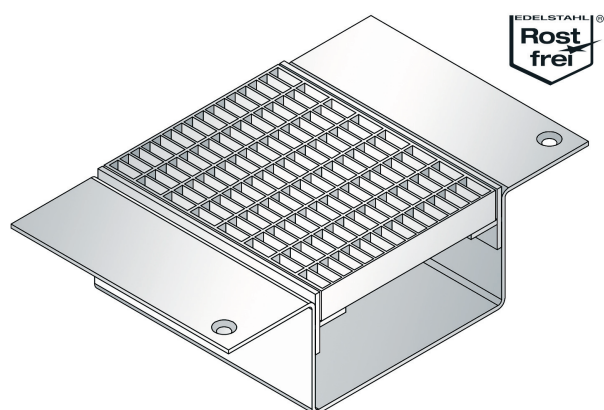

FEATURES

durable leak-proof, noncorrosive, high flexibility (variable lengths, heights and widths), mesh size of the steel grating in 30X10 mm or 30x30 mm possible

APPLICATIONS

outdoor, multi-storey and underground park decks, all industrial applications, shopping centres, railway stations, airports, exhibition halls

MATERIAL

hot-dip galvanised steel, high-grade steel V4A (on request)

COVERING TYPES

coating

TRAFFICABILITY

truck (on request)

FORMED PARTS

gutter end piece (flange all around or upstand), corner piece, T piece, cross piece, gutter drain, 2 lock per grid

NOTES

A leak-proof welding of several gutter-parts happens in the course of installing at the building site.

For stainless steel gutters, the general cleaning and care instructions must be observed (see also www.buprofile.de - Download section).


Our engineers and technicians can be of assistance during installation on request.

Technical data

Material thickness gutter: 4 mm
Material thickness mounting bracket: 5 mm
Supply length: 3 mtr
Steel grating width: 200 mm

Designs

Article No.	Channel height (h)	Recess(WxD)
ALR.8.200/90	90 mm	260 x 100 mm
ALR.8.200/120	120 mm	260 x 130 mm
ALR.8.200/150	150 mm	260 x 160 mm
Special heights on request.		

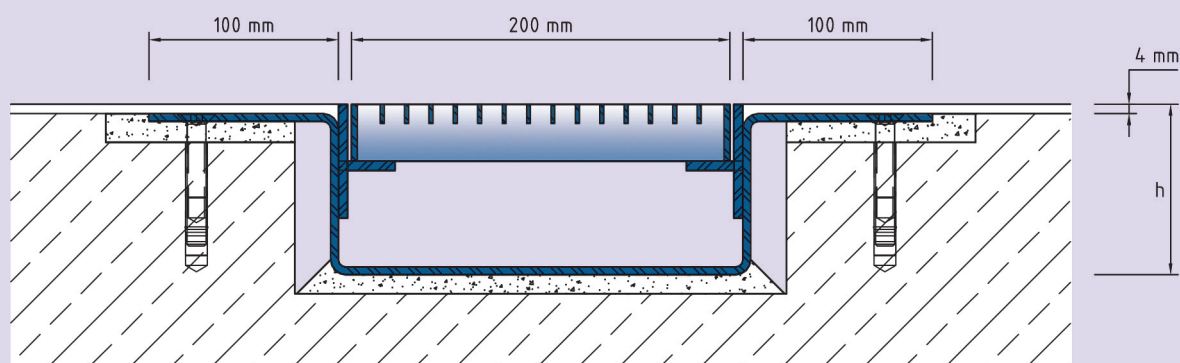

ALR.8.200

Subject to technical change without notice.