




VA.8.135/0

- **high load-bearing capacity**
- **installation in site-mixed concrete**
- **lightly structured surface with anti-slip effect**

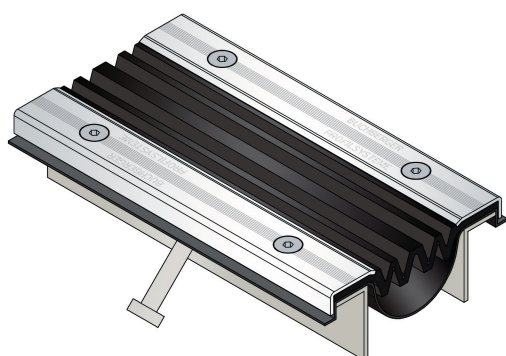

FEATURES

watertight, resistant to heavy loads, trafficable by fork-lift trucks, expansion insert can be replaced anytime, abrasion, weather and temperature resistant (-40°C bis +120°C), resistant to salt and waste-water (alcalics, microbes, bacteria), agreements may also be made for other sealing sections

APPLICATIONS

outdoor, multi-storey and underground park decks, ramp accesses, pedestrian bridges, all industrial applications

MATERIAL

hot-dip galvanised steel substructure and high-grade steel V2A surface, synthetic rubber flexible insert (EPDM), sealing insert made from Wolfin IB

COVERING TYPES

coating, concrete, industrial covering

TRAFFICABILITY

passenger car, trucks

FORMED PARTS

upstand, end piece, corner piece, T piece, cross piece, transition floor to wall

NOTES

The sealing and flexible inserts are connected using M8 bolts positioned at intervals of 150 mm.

Grouting profile VP5/20 is already installed at the factory.

The sealing insert which is looking on the sides of the profile out, has to be connected properly with the sealing system. This is very important to get a watertight result of the joint-profile.


Our engineers and technicians can be of assistance during installation on request.

Technical data

| | |
|---------------------------|--------------------|
| Movement horizontal: | 80 mm (-30/+50 mm) |
| Movement vertical: | 30 mm (±15 mm) |
| Visible width: | 135 mm |
| Maximal joint width: | 76 mm |
| Load rating trucks: | 600 kN (DIN 1072) |
| Supply length: | 3 mtr |
| Color of flexible insert: | black |

Designs

| Article No. | Profile height (h) |
|-------------|--------------------|
| VA.8.135/0 | 58 mm |

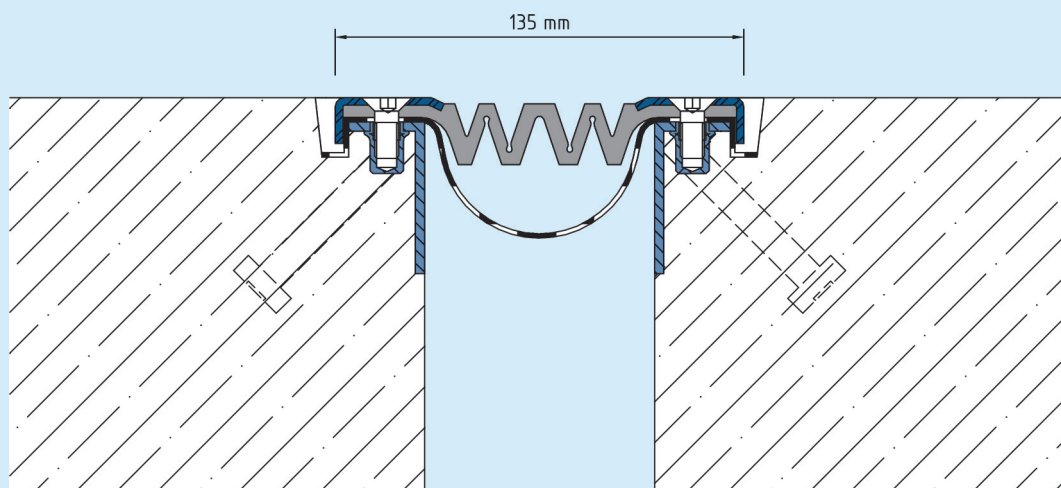

VA.8.135

Subject to technical change without notice.